



HQ3200-TX8 (High-speed)


Direct Textile Print & Color Fixation

KEUNDO 坤度

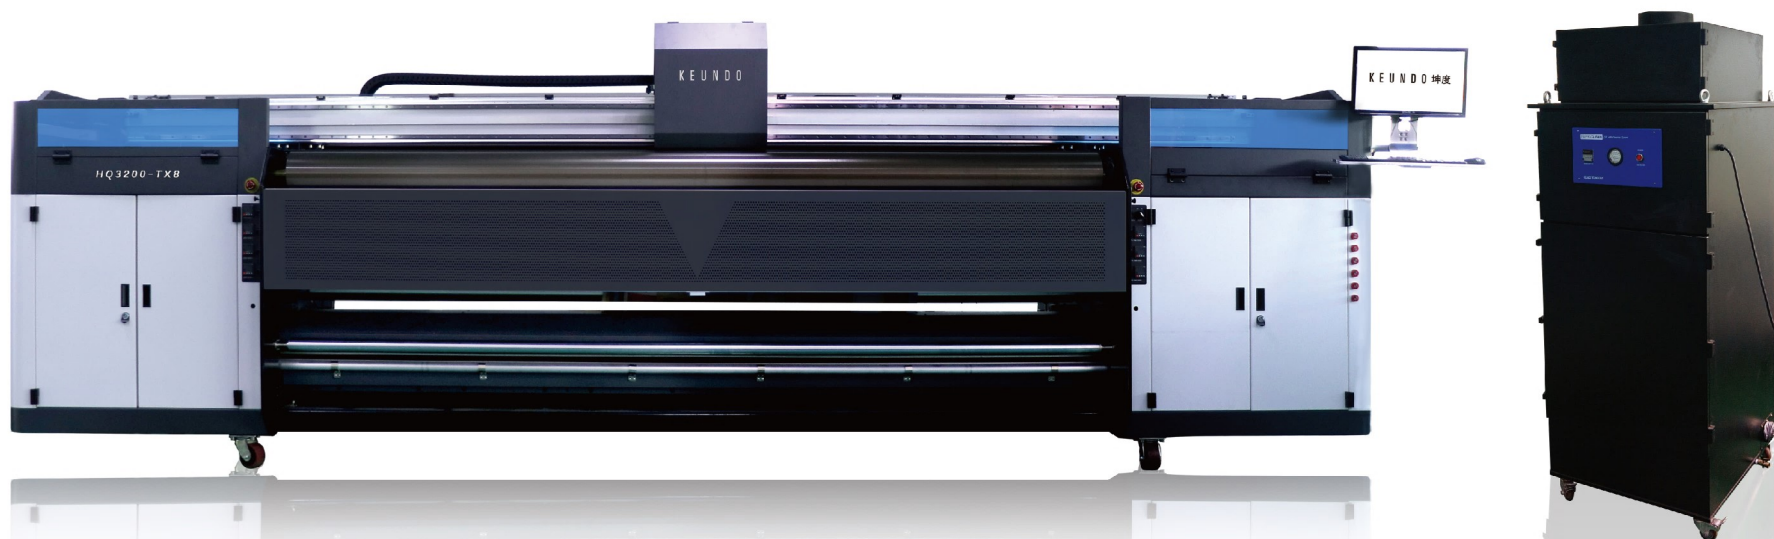

KEUNDO Sublimation Ink
C M Y K * 2







COLOR FIXATION
Internal installation color fixation , simplified process, easy operation and improved work efficiency.



DANCING BAR
It can maintain constant media tension to secure stable feeding.




METAL ENCODER STRIP
Metal encoder strip helps for more stable and accurate carriage horizontal movement.



AIR-SHAFT ROLL
Adjust Air-shaft roll to install media more conveniently.



AIR DEGASSING UNITS
It removes micro bubbles in ink while transferring ink to main ink tank.



AUTO CLEANING SYSTEM
Clean head and head plate automatically by builprogram.




CARRIAGE SYSTEM
Robust structure design secures stable carriage more ment and printing performance.




LEVEL MEDIA ROLL
Decreasing wrinkles during substrate's feeding and raising the friction of main roll for smooth feeding operation for all kind of fabrics.




FRONT DRYER
Applied FIN to the out-side of dryer for wide dry after print. It could dry textile material(s) perfectly on any mode of pass(es).



MEDIA TENSION CONTROL SYSTEM
Electrical pneumatic control tension generates constant tension of various materials automatically.



VERSATILITY
Depending on the purpose of printing by fabric(s) or transfer paper,the printing platform is changeable between vacuum plate for paper and waste ink slot for fabric.



DUAL THK GUIDE RAILS
Dual 2.0cm width mute THK guide rail, ensure carriage horizontal movement more stable .

● Technical Specifications

HEAD	8pcs Ricoh Gen6 5 picoliter nominal drop size
INKS	Water based Disperse Sublimation Ink, 4 colors (C, M, Y, K * 2)
INK CAPACITY	Main ink pail 2.5L
MATERIAL TYPE	Pre-coated Dye-Sublimation Polyester, Mesh polyester, Transfer paper(In-Direct) and etc..
MATERIAL SIZE	Width : 3.2Meter , Roll Diameter : 400mm
PRINTING METHOD	Roll to Roll
MAX MATERIAL THICKNESS	1MM
PRINTING SPEED	Production mode : 200sqm/h Quality mode : 120sqm/h High quality mode : 70sqm/h
RESOLUTION	360*600dpi, 720*600dpi, 720*900dpi, 720*1200dpi,720*1800dpi,1440*1800dpi
MAIN PROCESSOR & S/W	Intel I3 & Windows OS
POWER	Operating mode : 45KW Sleep mode : 600W
ENVIRONMENT	Temperature: 18 C -26 C , Humidity: 30%-75% (RH)
CONNECTOR	USB 3.0
RIP	ONYX
POWER	AC220-240V, 50/60Hz, 40A
PACKING DIMENSION & WEIGHT	5,840(W) x 1,250(D) x 2,000(H) (Unit : mm) 1,750Kg , 3,858lb(Pound)

Can print directly onto fabric or paper to transfer using aqueous dye sublimation ink.
Pre-coated dye-sublimation polyester, mesh polyester, transfer paper(in-direct) and etc..

